


## Makeup-Flow Splitters

# QuickSplit™ Makeup-Flow Splitters

for Mass Directed Fraction Collection

### variabler Makeup-Flow Splitter

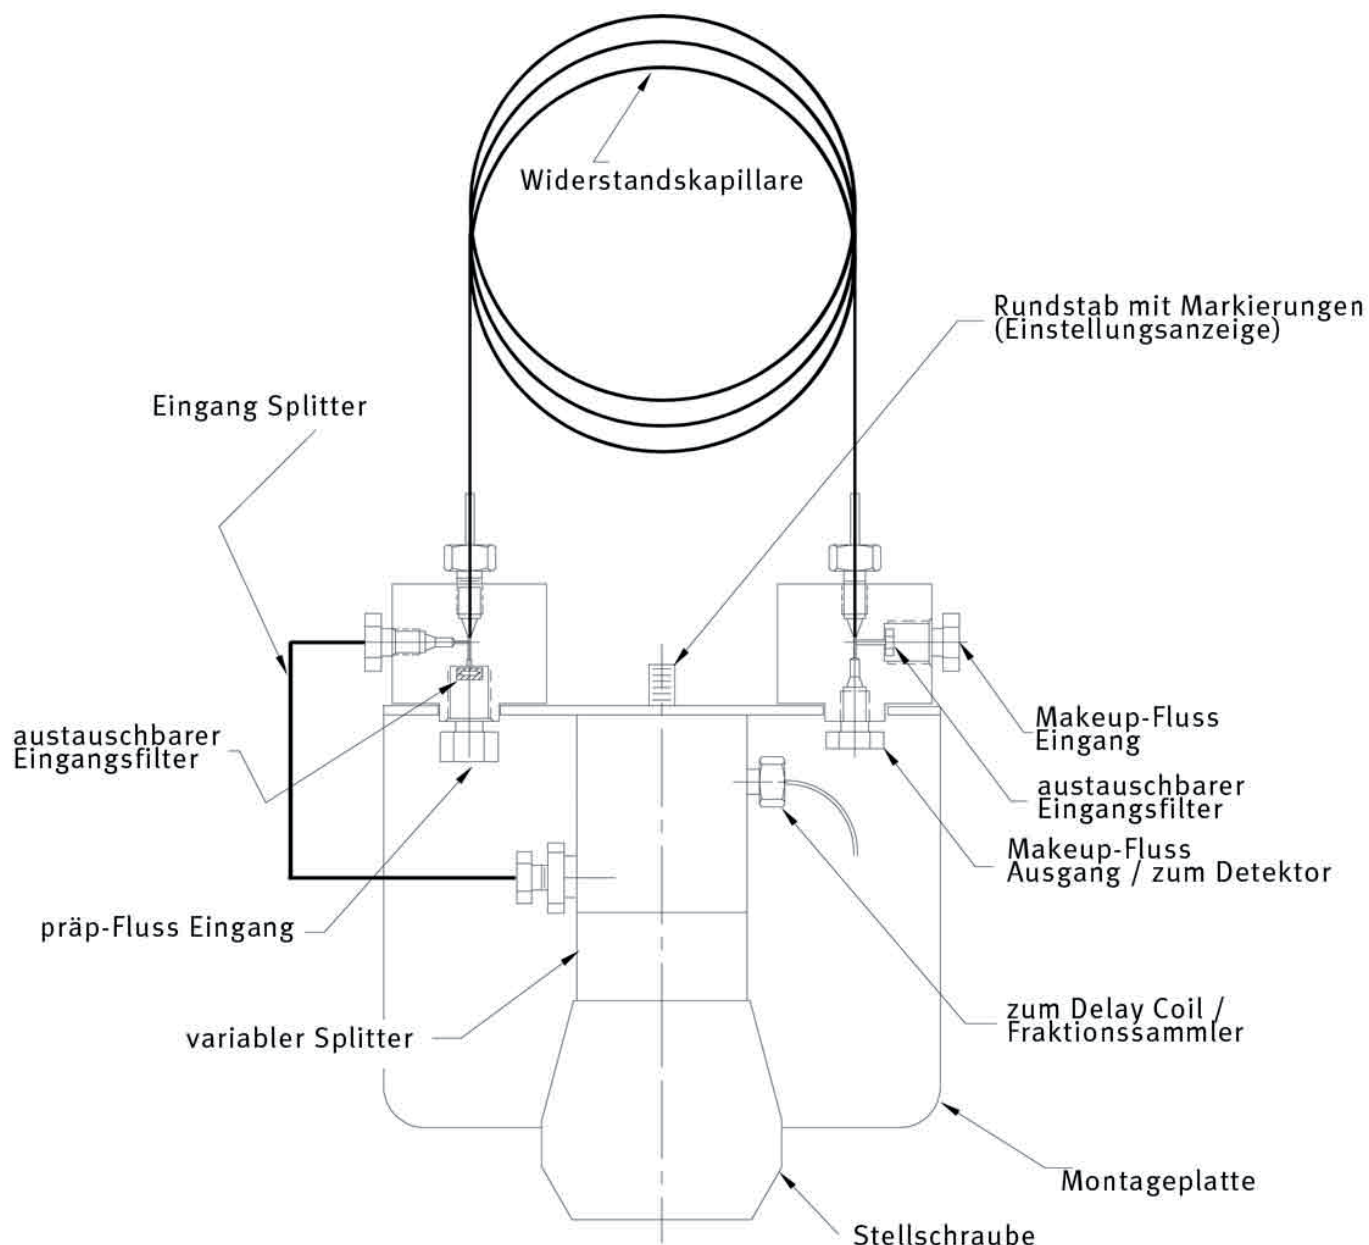

1

Distributor:

# Makeup-Flow Splitters

## QuickSplit™ Makeup-Flow Splitter Accessories

### Adjustable Splitter: Variable Inlet Flow, Fixed Split Ratio

Description	Inlet Flow Range	Split Flow	Calibration Flow & Split Ratio	ASI Part Number
Makeup-Flow Splitter	1 - 10 mL/min.	5 µL/min.	5 mL/min. = 1,000:1	690-PO01-05
Makeup-Flow Splitter	1 - 10 mL/min.	10 µL/min.	5 mL/min. = 500:1	690-PO01-10
Makeup-Flow Splitter	1 - 10 mL/min.	20 µL/min.	5 mL/min. = 250:1	690-PO01-20
Makeup-Flow Splitter	1 - 10 mL/min.	50 µL/min.	5 mL/min. = 100:1	690-PO01-50
Makeup-Flow Splitter	10 - 50 mL/min.	5 µL/min.	30 mL/min. = 6,000:1	690-PO10-05
Makeup-Flow Splitter	10 - 50 mL/min.	10 µL/min.	30 mL/min. = 3,000:1	690-PO10-10
Makeup-Flow Splitter	10 - 50 mL/min.	20 µL/min.	30 mL/min. = 1,500:1	690-PO10-20
Makeup-Flow Splitter	10 - 50 mL/min.	50 µL/min.	30 mL/min. = 600:1	690-PO10-50
Makeup-Flow Splitter	50 - 150 mL/min.	5 µL/min.	100 mL/min. = 20,000:1	690-PO50-05
Makeup-Flow Splitter	50 - 150 mL/min.	10 µL/min.	100 mL/min. = 10,000:1	690-PO50-10
Makeup-Flow Splitter	50 - 150 mL/min.	20 µL/min.	100 mL/min. = 5,000:1	690-PO50-20
Makeup-Flow Splitter	50 - 150 mL/min.	50 µL/min.	100 mL/min. = 2,000:1	690-PO50-50
Makeup-Flow Splitter	Custom	Custom		690-POCS-CS

#### Distributor:

# Makeup-Flow Splitters

## QuickSplit™ Makeup-Flow Splitter Accessories

### Adjustable Splitter: Fixed Inlet Flow, Variable Split Ratio

Description	Inlet Flow	Split Flow Range	ASI Part Number
Makeup-Flow Splitter	5 mL/min.	1.2 - 10.0 µL/min.	690-PO01-05
Makeup-Flow Splitter	5 mL/min.	2.5 - 20.0 µL/min.	690-PO01-10
Makeup-Flow Splitter	5 mL/min.	5.0 - 40.0 µL/min.	690-PO01-20
Makeup-Flow Splitter	5 mL/min.	12.5 - 100.0 µL/min.	690-PO01-50
Makeup-Flow Splitter	30 mL/min.	1.2 - 10.0 µL/min.	690-PO10-05
Makeup-Flow Splitter	30 mL/min.	2.5 - 20.0 µL/min.	690-PO10-10
Makeup-Flow Splitter	30 mL/min.	5.0 - 40.0 µL/min.	690-PO10-20
Makeup-Flow Splitter	30 mL/min.	12.5 - 100.0 µL/min.	690-PO10-50
Makeup-Flow Splitter	100 mL/min.	1.2 - 10.0 µL/min.	690-PO50-05
Makeup-Flow Splitter	100 mL/min.	2.5 - 20.0 µL/min.	690-PO50-10
Makeup-Flow Splitter	100 mL/min.	5.0 - 40.0 µL/min.	690-PO50-20
Makeup-Flow Splitter	100 mL/min.	12.5 - 100.0 µL/min.	690-PO50-50
Makeup-Flow Splitter	Custom	Custom	690-POCS-CS

#### Distributor:

# Makeup-Flow Splitters

## QuickSplit™ Makeup-Flow Splitter Accessories

### Adjustable Makeup Capillary Resistors

Description	Split Flow rate	ASI Part Number
Replacement Capillary Resistor for Adjustable Splitters	Output Flow, 5 µL/min.	690-POCR-05
Replacement Capillary Resistor for Adjustable Splitters	Output Flow, 10 µL/min.	690-POCR-10
Replacement Capillary Resistor for Adjustable Splitters	Output Flow, 20 µL/min.	690-POCR-20
Replacement Capillary Resistor for Adjustable Splitters	Output Flow, 50 µL/min.	690-POCR-50
Replacement Capillary Resistor for Adjustable Splitters	Output Flow, Custom	690-POCR-CS

### Replacement Inlet Filters for Both Fixed and Adjustable Splitters

Description	Applications	ASI Part Number
Inlet Filter Assembly, 2 micron .063" dia. 5/Pack, 1 µL Volume	Makeup-Flow Splitter inlet Port - Inlet flow range: 1 ~ 10 mL/min. Makeup-Flow Splitter, MakeupInlet Port - All Ranges	690-0063-2
Inlet Filter & Housing Assembly, 10 micron .125" dia. each, 4 µL Volume	Makeup-Flow Splitter inlet Port - Inlet flow range: 10 ~ 50 mL/min.	690-23-0125-10
Inlet Filter & Housing Assembly, 10 micron .188" dia. each, 10 µL Volume	Makeup-Flow Splitter inlet Port - Inlet flow range: 50 ~ 100 mL/min.	690-23-0188-10
Inlet Filter & Housing Assembly, 20 micron .188" dia. each, 12 µL Volume	Makeup-Flow Splitter inlet Port - Inlet flow range: 75 ~ 150 mL/min.	690-23-0188-20
Straight Thru Hole, Fitting & Housing Assembly, No Filter each, 1 µL Volume	Makeup-Flow Splitter inlet Port	690-001-2-3

**Distributor:**